

Human - Artificial Intelligence Teaming for Automotive Applications: A Review

Evangelos D. Spyrou^{*}, Vassilios Kappatos^{}, Afroditi Anagnostopoulou^{}

Hellenic Institute of Transport, Centre for Research and Technology Hellas, Thessaloniki 57001, Greece

Corresponding Author Email: espyrou@certh.gr

Copyright: ©2024 The authors. This article is published by IIETA and is licensed under the CC BY 4.0 license
(<http://creativecommons.org/licenses/by/4.0/>).

<https://doi.org/10.18280/ijtdi.080201>

ABSTRACT

Received: 12 March 2024
Revised: 25 May 2024
Accepted: 7 June 2024
Available online: 30 June 2024

Keywords:

human-AI teaming, automotive,
reinforcement learning, vehicle

Human Artificial Intelligence Teaming (HAIT) is a significant topic that is dominating different research domains. One of these domains is the automotive industry, whereby automation is suggested to certain aspects of driving, while the driver can intervene and be aware of the decisions. Trust is a major issue; hence the AI collaborates with the human towards making a decision regarding different aspects of driving. The Internet of Vehicles (IoV) is a topic that can use HAIT in many of its applications. A major point of the HAIT application is the increase in the transparency of the AI process and trust is being built between the two teammates. In this paper, the goal is to offer a comprehensive review of HAIT and its significance, going deep into various representations to facilitate the development of automated vehicles systems. HAIT seeks to promote trust in automated automotive systems, particularly regarding data sourced from vehicle sensors. The human roles 'in,' 'on,' and 'over' the loop within HAIT is provided, elucidating their pivotal contributions. Furthermore, ongoing academic contributions are reviewed integrating HAIT into the automotive sector, emphasizing the symbiosis between IoV and AI to forge unified solutions. The solutions have been separated according to their functionality and models used comprising Reinforcement Learning, Hidden Markov Models, Deep Learning and experiments as well as simulation based methods. The use of HAIT in automotive applications will pave the way to its utilisation in other disciplines such as aviation and maritime.

1. INTRODUCTION

Artificial intelligence (AI) is being utilised as a paradigm to a variety of industries enhancing data processing and decision making actions. In healthcare, diagnoses and treatment plans are assisted with AI being at the forefront [1]. In finance, AI is encapsulated to detect frauds and optimise strategies [2]. In education systems, custom learning experiences are performed [3]. In the transport domain, routing can be safely and efficiently planned [4]. Moreover, manufacturing [5], agriculture [6] and cybersecurity [7] constitute domains whereby AI thrives towards their efficient transformation.

In the automotive domain, AI is utilised to improve safety, efficiency and the driver's functions in the vehicle. AI is used in autonomous vehicles as well as in driving assistance systems, which change the driver's state of mind as well as the vehicle's tasks. The prevention of accidents is performed by the increased perception of the environment and the decision making in complicated traffic scenarios [8]. In addition, predictive maintenance based on AI models predict and prevent vehicle failure, minimising downtime [9]. AI models are also utilised for fuel consumption optimisation [10], routing [11] and customisation of driver custom preferences [12]. It is clear that the use of AI-based technologies leverages the safety, security and pleasant driving experience.

HAIT involves and combines the human perception advantages with the accuracy of the models of AI, and the disadvantages of both are being addressed. There is ongoing research that deals with the opinion of humans on AI-based systems in terms of how reliable explainable and biased they are.

The perceived reliability of AI is crucial for human trust and utilization. For instance, Zhang et al. [13] demonstrated that providing healthcare workers with insights into AI's data transformation process boosted their perception of data quality reliability. Another study found that AI was exhibited better reliability than humans in decision support contexts. AI systems with accountable and explainable features are more likely to gain the trust of human decision-makers (DMs).

The HAIT design distinguishes the authority each team member has over independent control and the individual contribution towards task completion. Endsley and Kaber [14] define levels of automation in systems. The levels of intervention of the individual to a system are given in Figure 1.

The AI-first design paradigm assumes a dynamic circulation of knowledge across the network, enabling decision-makers and autonomous systems to collaborate effectively. Autonomous systems excel in deductive reasoning and solving complex tasks, including automotive applications

such as cruise control [15] and lane detection [16]. Operators perform well at applying context and providing input to specific tasks. Automation tasks place when complex tasks' outputs come from sensors and systems, i.e., navigation of vehicles. In particular, the system may identify the best potential road along the path of the vehicle.

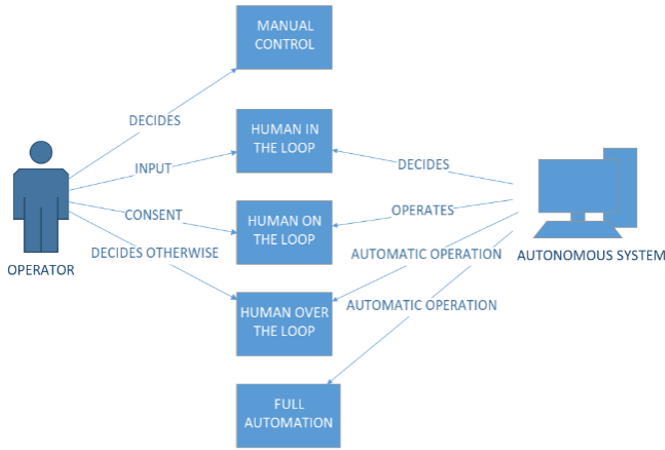


Figure 1. Levels of automation

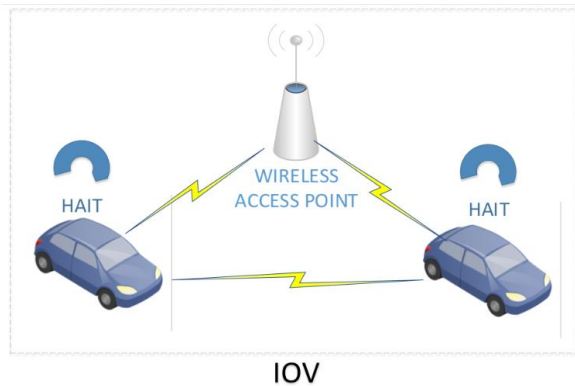


Figure 2. IoV with HAIT

IoV [17] has emerged during the last decade whereby the vehicle is connected to the Internet and decisions are thereby made regarding several aspects such as platooning [18]. The IoV can move towards the HAIT, in terms of assisting the driver with decisions coming from Road Side Units (RSUs) or other vehicles by an AI system. There the driver will obtain the data wirelessly and the data will be fed to a Machine Learning (ML) and/or AI system to inform the driver regarding specific actions that need to be performed to optimise driving. A basic IoV network with HAIT capabilities is given in Figure 2.

An example of IoV with HAIT is dynamic routing. Taking RSUs in the traffic lights where the traffic is communicated based on the queues of the roads and the speed of the vehicles, the communication system of the vehicle takes the information of the aforementioned metrics and calculates the best route taking into account the current state of the roads. The in-vehicle system informs the driver regarding the proposal of the new route and it is up to the driver to follow it or select a different route. Upon a good decision by the model of the vehicle the driver will acknowledge the optimal decision to the system.

In this paper, the reader is provided with the necessary information to comprehend the notion of HAIT. Using the

different ways of representing HAIT an automated IoV system can be built, which will take advantage of the wireless capabilities available and the AI methods that can be utilised to perform some action. The reason behind HAIT is to enable and enhance trust of automated automotive systems, namely the data coming from sensors of the vehicles and RSUs. We present the human in, on, and over the loop concepts and finally, we provide a review of the current academic works that involve HAIT in the automotive domain. The aim is to work closely with the aspects of IoV and AI to integrate them to common solutions. The IoV is a research domain which gets attention due to the dominion of the Internet of Things (IoT). Models that need to be simple to run with minimum delay of response should be available and constructed to maximise the performance of the IoV. Taking, for example, the use of telecommunications to connect a RSU with a vehicle, the response time should not exceed seconds because the nature of the deployment is dynamic and hazardous. Hence, the AI model of the vehicle needs to assist the driver in a fast manner and the driver to assess, agree or not with the suggestion within seconds. This gives a new dimension to the creation of models for HAIT.

2. EXPLANATION OF HUMAN-AI TEAMING THEORY

In this section, we examine the dynamics of four distinct methods from the study [19], where humans and AI assume specific roles. These methods include:

1. Human-in-the-loop, where AI provides decision support.
2. Human-on-the-loop, exemplified by straightforward vehicle operations.
3. Over-the-loop, involving a team of distinguished members with primary and supervisory authority.
4. A model where AI and humans function as independent decision-makers.

These approaches highlight various ways in which humans and AI can collaborate to optimize task performance.

2.1 Human in the loop (HITL)

Here we take a machine learning model-based system that gets knowledge of particular situations on the road, which requires action, lets the human know regarding it, and waits for direction.

In this scenario, the human assumes the role of safety controller, with the system acting as an assistant to implement the control actions. The human is responsible for decision-making tasks, such as data labeling. Measurements from various sensors are provided to the AI for processing, which then displays relevant data aspects to the human.

The human can request additional input from sources beyond the AI's knowledge base. The AI becomes aware of the human's actions through information relayed from the sensors.

2.2 Human on the loop (HOTL)

The human on the loop process provides the AI with permission to act unless the human decides otherwise and performs an override. Essentially the human plays the role of input or decides to override the process decision of the AI. The AI recommends an option in advance of action; on the other

hand, the human gives permission for the action to be performed or she selects from alternative options to change the decision.

There is a debate here on the type of data the human possesses and the risk they are considering which would change the decision of the control. An example of an automotive application is the throttle control, which can be automated and overridden by the driver.

2.3 Human over the loop (HOVTL)

Here we regard to decision-makers who act in an independent manner over the same control. Both of the decision-makers are set in series and the second can pose an argument to the first. The primary and the supervisory decision makers can benefit from the sensor data, process it and obtain information to handle their process. The primary decision-maker acts on the basis of the sensor input and perception.

The AI can make decisions based on its model; hence providing routine results. The human, on the other hand, may have to override the decision without sufficient knowledge, which poses a problem in the procedure. To address this issue, the supervisory process must gather inputs that clearly capture the context and safety status.

This process benefits from incorporating additional sensor data. Off-nominal conditions should not be automatically attributed to human error without an explainable context, enabling humans to effectively manage contingencies.

2.4 Autonomous peer decision makers

In this setup, an AI system and a human collaboratively influence the same control process, each with distinct decision-making authority and mechanisms. The AI contributes computational power and data analysis, while the human adds intuition, creativity, and contextual understanding. Both parties can seek additional input to enhance their decision-making, allowing for diverse perspectives, real-time feedback, and adaptation to changing conditions. A summary of these methods is provided in Table 1.

Table 1. HAIT methods summary

Method	Summary
HITL	Direct human control, high reliability but slower decision processes.
HOTL	Supervisory control, equilibrium for efficiency and safety.
HOVTL	Strategic oversight, maximizing efficiency with minimal direct intervention.
Autonomous peer decision makers	Collaborative autonomy, achieving high efficiency and exceptional adaptability.

3. HAIT APPROACHES IN THE AUTOMOTIVE DOMAIN

This review of academic contributions to HAIT has been primarily undertaken using Google scholar, which has an overlap with other databases. The articles that have been found were selected according to the relevance with the proposed subject and the academic nature of the contribution. The synthesis of the data has been done based on the respective

method that has been used to tackle specific issues in the automotive sector.

Primarily, in this section, examples of the different aforementioned models are given. For the HITL, an example can be when the car at front increases its acceleration and the system of the car behind calculates the distance based on some kind of sensor to keep a platooning type of movement. For the HOTL, an automotive application is the throttle control, which can be automated and overridden by the driver. For the HOVTL, course management in vehicles can be automated and further data can be available to the human to make a different call where applicable. In terms of the autonomous peer decision makers, a vehicle may have its own automated cruise control based on RSU and Vehicle to Vehicle (V2V) data while the driver can act independently of the throttle and brakes. A coordination mechanism needs to be present in order to make the teammates act to the benefit of the drive. Here we have different accountability since the processes act independently. Reading in Kumar et al. [20] and references therein, there is a number of applications of autonomous vehicles that use the HITL method.

The market for automotive artificial intelligence is expanding globally, characterized by its size, trends, and industry growth across various segments. It covers offerings such as hardware and software, driven by technologies including deep learning, ML, natural language processing (NLP), context-aware computing, and computer vision. This market analyzes components, processes, applications, and regions, with projections extending to 2028 (<https://www.researchcorridor.com/global-automotive-artificial-intelligence-market/>).

There exists a number of advancements in the development of intelligent assistants using AI in the automotive industry. These include:

-Audi Autonomous Intelligent Driving (<https://www.audi-mediacycenter.com/en/audi-ai-9099/download>) is actively researching and developing autonomous driving capabilities, integrating AI technologies with human input to create safe and efficient driving solutions.

-Waymo (<https://waymo.com>) is the self driving car project designed by Google, that has been one of the leaders of autonomous vehicles and it encapsulates AI with human intervention in order to create self-driving cars that enhance safety and efficiency.

-Tesla's Autopilot system (<https://www.tesla.com/support/autopilot>) integrates AI and human tasks in order to assist drivers with driving functions such as lane-keeping, adaptive cruise control, as well as automated parking.

-Uber ATG (<https://www.uber.com/en-GR/blog/machine-learning-model-life-cycle-version-control/>) integrated AI for navigation purposes and safety while altering the driver to a act in a supervisory role with the ability to intervene.

-BMW (<https://www.bmwgroup.com/en/innovation/automated-driving.html>) created a campus that concentrates on the development of autonomous driving technologies, integrating AI and human abilities in order to increase vehicle automation.

-Mercedes-Benz (<https://www.mercedesbenzofeaston.com/mercedes-benz-intelligent-drive-overview/>) created Intelligent Drive systems, which encapsulate AI-based models in order to increase safety and satisfaction of driving comfort.

-Ford (<https://media.ford.com/content/fordmedia/fna/us/en/news/2023/03/02/ford-establishes-latitude-ai-to-develop-future-automated-driving.html>) is investing in autonomous vehicle technologies, utilizing AI and human supervision to develop next-generation mobility solutions.

-NVIDIA's DRIVE platform (<https://developer.nvidia.com/drive>) provides AI computing solutions for autonomous vehicles, supporting human-AI collaboration in the automotive industry.

3.1 Reinforcement learning-based systems

Wu et al. [21] present a research work, which creates a HITL Deep Reinforcement Learning (DRL) system that viably leverages human insights in real-time amid show preparing. A real-time Human-Guidance based DRL (HugDRL) strategy is created and effectively connected to the operator preparing beneath independent driving scenarios. Beneath the proposed design, an energetic learning prepares adaptively apportioned weighting variables to human encounter and DRL activity, in arranging to optimize the DRL's always progressed capacity over human direction amid the by and large preparing handle. Based on this human-in-the-loop direction instrument, a moved forward actor-critic architecture with modified arrangement and esteem systems is created.

The rapid integration of the proposed HugDRL facilitates the real-time integration of human-directed activities within the agent's training cycle, significantly enhancing the efficiency and performance of deep reinforcement learning. This method has been validated through human-in-the-loop tests involving 40 subjects and compared against other state-of-the-art learning approaches. The findings indicate that the proposed approach effectively improves the training efficiency and performance of deep reinforcement learning algorithms under human guidance, without mandating specific expertise or prior experience from participants.

Gopinath et al. [22] focus is directed towards human-AI driving teams, where the AI system interacts closely with the driver through tactile data during critical moments of the driving task. In this scenario, it is assumed that the human maintains continuous control over the vehicle, with the AI system providing recommendations, alerts, or other supportive measures to assist the driver. This approach contrasts with more autonomy-driven integration setups, where the AI system aims to override the driver by assuming control of the vehicle. Such setups are designed to respect the inherent preferences and capabilities of the human partner.

The goal is to demonstrate the flexibility of the proposed system in accommodating various characteristics of human drivers, such as their level of distraction, cautiousness, and preferences towards AI-based interventions. The authors model this scenario as a reinforcement learning (RL) problem, seeking to find a policy—a mapping of observations by the agent to actions taken on behalf of the agent. They conceptualize both the human and AI system in terms of their higher-level objectives and constraints within a framework of rewards. This framework allows for the representation of the agent (the policy) as either a single entity representing both the human and AI systems working together, or as two separate entities interacting with each other. While their approach primarily supports the former (i.e., a joint policy), the system accommodates both configurations to generate results effectively.

The approach learns from real-world perceptions gathered through experiences and continuously improves by maximizing a cumulative reward for each rollout generated by the trained policy. In the context of human-AI collaboration, the state encompasses a simulated environment that includes other vehicles, road conditions, and the human's state. Observations are potentially imperfect measurements of this environment.

The human model is formulated as a Markov Decision Process (MDP), which specifies how the system transitions from one state to another based on actions taken, along with associated rewards (e.g., speed preferences) or penalties (e.g., collisions) incurred during these transitions. To train policies within this framework, a policy gradient method is employed, specifically the proximal policy optimization (PPO) algorithm. This method facilitates the iterative improvement of policies to optimize performance in navigating and interacting within complex driving scenarios.

Huang et al. [23] propose a reinforcement-learning-based approach for designing shared control in semi-autonomous vehicles involving human supervision. The collaborative effort between the assistant pilot controller and the driver enables simultaneous vehicle control. To account for driver reaction time, the human-vehicle system is characterized using differential-difference equations. Real-time data is utilized to develop an adaptive optimal shared controller through adaptive dynamic programming, without requiring complete knowledge of the driver and vehicle models.

The data-driven shared steering controller ensures near-optimal solutions, adaptation, and stability within the human-in-the-loop vehicle system. It effectively manages potential variations and uncertainties in the human-vehicle interaction. The efficacy of this control strategy is substantiated through theoretical proofs and demonstrated with numerical results, affirming its capability to enhance operational efficiency and performance.

Elmalaki [24] states that the number of applications targeting the automotive sector is expected to be high. Hence there is a necessity of a systematic framework that assists to the design and verification of these applications. Furthermore, these applications are built in order to have an interaction with the human; thus, there is the need for human-centered applications. Here, the authors, propose the MAConAuto, which is essentially a framework that encapsulates the preferences of the human behavior and reaction time at the core of the automotive applications. This framework can provide support for two types of applications with respect to the intervention level. These are: Type I, Direct-based interaction and Type II, Monitor-based interaction. MAConAuto is highly adaptive to human variability using a RL engine that tunes the assistance that the two application types perform by addressing certain challenges of human reaction modeling regarding these assistive interventions. The authors elaborated on the design of the system with verification from two applications, namely the context aware Heating Ventilation and Air-Conditioning (HVAC) and context aware Forward Collision Warning (FCW).

Ahadi-Sarkani and Elmalaki [25] investigate the Lane Departure Warning (LDW) systems. These particular systems obtain their data from algorithms that handle sensors rather than encapsulating as well the driving behavior of a driver as well as the physiological data. An Adaptive Driver Assistance System with Reinforcement Learning (ADAS-RL) is suggested which includes the human factor into LDW

approaches. The drivers' response time to functionalities, their driving characteristics and the levels of concentration are taken into account to customize the warning times as well as the frequency. The ADAS-RL is essentially a HITL system, which tweaks the frequency of the warnings to drivers according to the level of concentration in the vehicle. The distraction levels of the drivers are considered to optimize the level of warnings. The proposed system detects the variability in the driver response times; hence it shows the level of adaptation depending on different behaviors of drivers at both simulation and real test cases.

In the study [26], an advanced HITL-RL system is suggested, which aims to construct policies of driving, integrating transportation and robotics characteristics. The Human as AI Mentor (HAIM) is at the heart of this research, whereby humans perform tasks that include supervision, interventions as well as demonstrations to AI models while being in a learning procedure. A HAIM-DRL is proposed, which utilized DRL with interventions by humans to strengthen safety in Autonomous Vehicles (AV)s as well as maximizing the efficacy of the traffic flow. The HAIM-DRL, provides several strengths, which comprise the increased training safety which is vital for real test cases of AV deployment and optimized efficiency in training. Other advantages include the better integrations of AVs to traffic by minimizing disruptions and performing better flow of traffic, as well as supreme generalization to different scenarios. In summary, this paradigm provides a standard for a collaborative setting between humans and AI systems, whereby safety and efficiency are promoting in AVs.

Future research directions will focus on real-world implementation, scalability of the framework, and reducing dependency on perfect human expertise by learning from a wide range of human drivers. Integrating additional transportation domain knowledge will also be critical for advancing the seamless integration of AVs into mixed traffic environments, ultimately contributing to the development of smarter and safer transportation ecosystems.

The RL methods presented offer several advantages: real-time human insights improve training for autonomous driving scenarios, balancing human input with DRL actions optimizes learning, and RL enhances training efficiency and performance without needing specific expertise. Additionally, these methods increase safety, stability, and context-aware interactions, while personalizing outcomes based on individual actions.

3.2 Hidden Markov model-based systems

Dai and Xu [27] explore control augmentation within HITL systems, such as advanced driver assistance systems, where human capabilities impose limitations like visual range and understanding of the Internal Vehicle Model (IVM). The research proposes a novel framework centered on a new human IVM model comprising a Hidden Markov Model (HMM)-based parameter predictor and an augmenting controller. This framework aids in precisely tracking a pre-determined trajectory for the controlled vehicle.

The HMM method includes a specific issue that needs to be addressed which is the human IVM parameters alignment at the time of the Expectation-Maximization (EM) procedure. In the case that the IVM parameters are not known, recursion is performed to obtain a closed-form solution which addressed dynamical systems. Simulations of pilot-controlled quadrotor

attitude control has been performed to validate the suggested method in terms of how effective it is. During the simulation, there was a clear performance increase of the closed-loop system in comparison to the human IVM error not being corrected approach. Already used HITL systems will lack of the advancement of their capabilities comparing to the proposed approach in a diverse number of applications.

Janssen et al. [28], suggest a HMM framework targeting semi-automatic vehicles. The approach aims to formalize the beliefs of the humans in terms of the modes of operation of the aforementioned vehicles. This work takes as a start previous research, which determines different automation levels and the level of expectation of the operator involvement. Moreover, the prior work determines the distinct automation levels of the vehicle as well as the modes of operation, which are timely – evolved. The levels of automation are required to be obtained in an accurate manner, since the driver may get confused regarding the mode of automation of the vehicle. The HMM that is being suggested, is there to address the confusion of the driver which comes as a result of wrong beliefs regarding the modes of automation. This work coincides with other theories and research works targeting automation in vehicles. It serves as a contributor to the design and evaluation of automation in systems as well as future infrastructure of the transport domain. It also provides insights towards understanding and handling issues that arise in real test cases in terms of automation.

HMMs model human behavior by representing the sequential and probabilistic nature of actions and states through hidden states and observable states (actions influenced by hidden states). Transition probabilities model how human states evolve over time, while emission probabilities link hidden states to observable actions. Parameters are learned from data using algorithms like Expectation-Maximization (EM). HMMs capture the evolution of behavior, handle uncertainty, and learn from real-world data for accurate and adaptive modeling.

3.3 Experimental, simulation-based and other systems

Chiang et al. [29] suggest integrating Human-in-the-Loop (HITL) design into a longitudinal automation framework, successfully implemented and validated on a passenger vehicle in real traffic scenarios. This system features a comprehensive architecture comprising an adaptive detection zone, supervisory control, and regulatory control, structured hierarchically for adaptability across different vehicles with minor adjustments. Safety enhancements are achieved through the adaptive detection mechanism, which prevents potential collisions with vehicles ahead during curves.

The supervisory control autonomously selects control modes independent of vehicle-to-vehicle communication, ensuring coherent operation within predefined acceleration limits. Regulatory control for throttle management is designed based on an understanding of human decision-making processes, aiming to minimize operational rules. This automation system assists human drivers by managing speed and inter-vehicle distance, alleviating driving burdens, particularly on long trips. Experimental results in actual traffic environments demonstrate the effective performance and comfort of the longitudinal automation system, validated against ISO 2631-1 standards.

Kuru [30] proposes that while human drivers may eventually cease driving, they will still need to be trained in

teleoperating fully autonomous self-driving vehicles (FA-SDVs) equipped with Vehicle-to-Everything (V2X) technologies for location-independent remote control. These capabilities are further enhanced with haptics and Tactile Internet to intervene promptly when AI encounters unforeseen situations beyond its autonomous capability.

To bridge existing gaps in this area, the paper explores establishing an ecosystem aimed at fostering location-independent collaboration between capable Human Teleoperators (HTS) and intelligent FA-SDVs. This concept is embodied in the HOTL-HT-SDV framework, which integrates two parallel worlds: the physical environment and its cyber emulation. The HOTL concept is studied from technological, psychophysical, and philosophical perspectives, emphasizing the critical role of haptic feedback in enabling timely interventions that enhance FA-SDVs' ability to handle uncertainties in real-time. By leveraging the full potential of this framework, the authors argue for accelerating the integration of vehicles into traffic by fostering high levels of trust, even without expecting the technology to achieve perfection. The dual active roles of HTS and FA-SDV are evaluated through Quality of Trust (QoT) metrics, ensuring bidirectional interaction that optimizes Quality of Experience (QoE) and Quality of Vehicle Experience (QoVE).

Different to Humans-Are-Better-At/Machines-Are-Better-At (HABA/MABA), where humans and automation agents are involved into a competition on who is the owner of a specific task, the suggested Human-Agent-Robot Teamwork (HART)-centric framework sets the priority for the engagement of a human while it gradually moves towards complete automation of FA-SDVs. The change that brings the adaptive automation from human intervention takes place via the utilisation of a collaborative and behavioral learning and it is shown in studies where proof-of-concept is necessary. This provides evidence of the benefit that may arise from collaborative learning.

Hong and Aparow [31] suggest the utilization of an end-to-end simulator that is implemented to support Level 3 safety systems for autonomous vehicles, as well as for the collection of data related to driving. The simulator comprises an IPG CarMaker with Simulink as well as the Logitech G29 Driving Force Steering Wheel and Pedals kit. Driving in a road network is available at the simulator. Recording of driving data is undertaken, and parsing as well as result clarification is given. Moreover, development and testing of ML algorithms is demonstrated. This simulator's primary objective is the streamlining of development of autonomous systems as well as the strengthening of reliable safety procedures that undergo testing.

Chen et al. [32] demonstrate a driving assistance system called HITL Connected Cruise Control (hCCC). This system integrates humans and machines towards collaborating between them which gives the flexibility to a non-automated but connected vehicle to be part in a platooning setting, while ensuring and improving string stability. The driver has control of the vehicle's functions, while the hCCC is more of an assistant which performs control modifications in order to keep the vehicle stable.

The controller of the hCCC is carefully designed with a bi-level architecture in order to accomplish control linearization. It utilises specific features taken from existing and established Cooperative Adaptive Cruise Control (CACC), including a feedback-feedforward control structure and a zero-spacing-error rule. Validation came as a comparison of the hCCC having drivers with existing CCC and it demonstrated that the

hCCC showed supreme stability taken as input a significant variety of human behaviour as well as uncertainties. Moreover, the hCCC was validated in a simulator in order to investigate its performance when real conditions are given. The results showed that the hCCC exhibited quite large improvements in comparison to human drivers, including acceleration reduction, less fuel dissipation and time-gap variation decrease. In contrast to traditional systems, the hCCC is flexible to the adjustment of parameters regarding users. This comes as a result of the enhanced string stability abilities that can encompass different driving behaviours.

Ropelato et al. [33] showed the Virtual Reality (VR) methods' efficacy to enhance vehicle driving experience. They simulated the physical properties affecting car driving characteristics, including the behavior of the engine and transmission system. Their software integrates with a 6 degrees of freedom (DoF) motion system to simulate acceleration during driving, utilizing input devices in a cockpit mockup to control the virtual car. AI-driven vehicles operate within a city environment, adhering to predefined traffic rules and interacting with both other AI vehicles and the driver's vehicle.

Additionally, the authors proposed five types of driving-related activities that can be automated and evaluated through an Intelligent Transportation System (ITS). They adapted the zpdes algorithm to drive vehicles, demonstrating how personalized teaching sequences can be developed. Challenges such as limited computational performance, integration of motion hardware, and effective simulation of city-wide traffic were acknowledged. A user study revealed that most participants experienced a high level of presence in the virtual world and demonstrated proficiency in operating the car within the VR driving simulator.

Ai et al. [34] suggest an enhancement of autonomous transportation in open-pit mines, the iMAPeM paradigm which introduces an intelligent mining system that incorporates humans in the loop, providing a reliable, efficient, and universal operating framework. The iMAPeM architecture features three categories of miners—biological, digital, and robotic—each with specific roles to improve safety and efficiency while reducing the workload on human miners. It also includes three models: autonomous, parallel, and emergence/expert, which can be adjusted based on the severity of production issues to ensure stable transportation policies.

The iMAPeM-based parallel mining system, YUGONG, has been implemented in various open-pit mines, demonstrating stability and efficiency in real-world scenarios. As the system's operating time and mileage increase, its stability improves, reducing reliance on the Expert/Emergency mode and lessening the tasks assigned to human miners. YUGONG is also evolving to incorporate human-machine interactive functions and a multimodal model, aiming to create a human-centered operation system that provides intelligent services for the diverse transportation needs of open-pit mines.

Wang et al. [35] introduce a human-in-the-loop multi-indices fusion decision framework (HITL-FD) for predicting Mars rover trafficability. The framework uses fuzzy theory to address the uncertainty of trafficability boundaries and integrates multiple evaluation indices through a fuzzy decision tree algorithm. Human-assisted decision-making is included in the decision loop, and a reward function based on decision error is proposed to create a closed-loop system. Results indicate that HITL-FD increases the performance of the trafficability prediction and decreases the uncertainty of the

terrain in comparison to decision method made only by machine.

Kaufman et al. [36] suggest a framework whose main objective is the cultivation of situational awareness of human AV systems by the joint action theory. This framework emphasizes on the significance of personalised, shared and decentralised situational awareness up to a threshold, in order to accomplish objectives related to joint action in the teams between humans and AVs. An example is the assurance of safety in transportation as well as the learning process from the behaviours of the AVs. There are also other goals that need to be satisfied such as the establishment of trust. The efficient collaboration is an outcome of the human and the AV having accurate representations of each other and processing them along with the driving context. There the situational awareness of the individual agent is mandatory in order to set and promote their actions.

The situational awareness is quite significant in order to allow the team to achieve its objectives. Explainable AI (XAI) is performed to be incorporated by humans as well as human input in real-time as well as AVs sensing related tasks. This is crucial for the exchange of data. The AVs can incorporate data for training to predict and personalise the communication depending to the different context. There is the necessity of the understanding of the interactions between four components, namely the characteristics of the AV, the objectives of each action, the individual conditions and the environment of the driving task. The comprehension of these core components is mandatory to enhance situational awareness and to secure efficient joint action. The successful joint action shows the necessity of the prediction and the adoption of the shared and individual situational awareness behavior; thus, assuring the fact that there is the need to coincide with the team's objectives.

The approaches discussed in this section have several limitations. HITL into automation frameworks can face adaptability issues in real-world conditions and safety assurance challenges across various driving environments. Teleoperation of fully AVs heavily depends on V2X communication and haptic feedback systems. Transitioning from user intervention to full autonomy in HART-centric frameworks can be complex due to collaborative learning modes. End-to-end simulator platforms may not accurately mimic the unpredictability of real-world driving. Human-in-the-loop Connected Cruise Control systems need thorough validation to ensure robustness for different driving behaviors. Virtual Reality simulations for car driving face computational performance challenges and issues in simulating realistic city-wide traffic. Autonomous mining transportation relies significantly on human oversight and expertise. Additionally, situational awareness in human-AV systems is compromised by the unpredictability of human behavior and limitations in current AI explainability methods.

3.4 Deep learning and neural networks

Usman et al. [37] propose a framework integrating a probabilistic Convolutional Neural Network (CNN) and fuzzy logic to predict accidents in vehicular networks. This approach emphasizes human-in-the-loop intervention through classification of driver emotions—such as heartbeat and facial expressions—complemented by traffic status analysis. A probabilistic graph-based inference model is employed to estimate accident probabilities using data classified during the

initial learning phase. Subsequently, a fuzzy rule-based mapping method maps the severity of accidents based on this model. Alerts are then generated for drivers to prompt appropriate actions. Validation of the framework was conducted using Kaggle data suitable for accident prediction, incorporating emotional states and road traffic data. Experimental results demonstrate superior performance compared to benchmarking methods in accurately predicting accidents. This improvement is evident in metrics such as accuracy, precision, and F1 score, underscoring the effectiveness of integrating human-in-the-loop considerations alongside other critical factors.

Schmidt et al. [38] explore learning in an industrial context focusing on object detection for autonomous driving. They propose distinct approaches for calculating uncertainty using ensembles. Additionally, they evaluate two training strategies for 2D object detection networks: continuous training and active class weighting. Continuous training is shown to reduce training time by approximately 55% and data requirements by 15% compared to training from scratch. They further demonstrate that active learning combined with dataset balancing methods enhances data efficiency. Beyond 2D object detection, the authors implement a proof of concept using a more sophisticated neural network for 3D object detection. This approach facilitates more efficient development of object detectors tailored for the automotive industry.

Deng et al. [39] investigate how speech impacts the measurement of drivers' trust in autonomous vehicles (AVs). Seventy-five participants were randomly assigned to high-trust and low-trust groups based on different AV performance scenarios. The high-trust group experienced AVs with perfect accuracy (100%), no crashes, and received visual-auditory system messages. In contrast, the low-trust group encountered AVs with 60% accuracy, a 40% crash rate, and received visual-only system messages. During driving tasks, voice interaction was employed to collect speech data. The study successfully induced states of both trust and distrust among participants. Speech features extracted from both trust groups were utilized to train a back-propagation neural network for predicting trust levels, achieving a maximum accuracy of 90.80%. This research presents a method for reliably assessing trust in AVs using voice recognition technology.

Deep learning empowers vehicles with advanced perceptual capabilities, intelligent decision-making, and enhanced interaction with drivers, thereby advancing the efficacy and safety of Human-AI Teaming in automotive applications. Sensor fusion and other methods to correlate the readings, encapsulating a variety of sensors such as cameras, lidar, On - Board diagnostics (OBD) are often utilised.

4. CRITICAL ANALYSIS AND COMPARISON

There is a number of solutions that exist are already part of the automotive industry with large players making their efforts in introducing AI with human involvement in the vehicles. The applications that have been selected to appear to this paper, pave the way to solutions that will be or have been already tested to vehicles using state of the art AI and ML methods. These methods are established in the scientific community and the automotive sector seems like a good candidate for their application.

However, the ML and AI methods that have been proposed,

may pose implications towards their complexity and/or the response time of the vehicle. A good solution is not always the optimal one. Using different ML models require their optimisation for the applicability to these systems that are real-time and safety critical. Simulations are essential to ensure the safety and efficiency of the approaches, while in real scenarios, operating in traffic may be a totally different case.

In terms of other disciplines, Vats et al. [40] whereby different domains are given in the form of applications. Here, the aviation industry is the primary focus, whereby the HAIKU project is ongoing and involves 6 use cases, including HAIT for startle effect, Drones, Air traffic management, and COVID spreading prevention in airports. A brief review on an example proposed in aviation follow.

The aviation industry faces significant challenges in managing projected increases in air traffic and the emergence of new flight modes like Unmanned Aerial Systems (UAS). The study [41] emphasizes the need to enhance system capabilities to handle the influx of data and make informed decisions. Increasing air traffic density across regions and the efficiency challenges in Demand-Capacity Balancing (DCB) underscore the evolution of Air Traffic Flow Management (ATFM) systems towards AI-driven solutions. ATFM systems increasingly rely on sophisticated AI models, integrating a "human in the loop" approach with explainable AI (XAI) to optimize human-machine interaction. Wei et al. [42] introduce flow-based management as a novel concept where controllers manage aircraft flows rather than individual aircraft in airspace, supported by a customized Human-Machine Interaction (HMI) system. Xie et al. [43] further enhances ATM efficiency with a predictive ML model, XGBoost, integrating SHapley Additive explanations (SHAP) and Local Interpretable Model-Agnostic Explanations (LIME) for decision support. While AI technologies are poised to complement human decision-making in ATM, their full integration into operational environments remains a pivotal development for future aviation systems, promising enhanced operational efficiency and decision support capabilities. The main problem of these approaches is the complexity of the flow and the fact that it is multi-parametric as opposed to the automotive sector which essentially involves less parameters.

Other aviation systems comprise assurance of maintenance [44] and safety including landings [45, 46]. These need to leverage the advantages of the HAIT in conjunction with those of the human towards a better organisation of the tasks. Safety in aviation is perhaps the most significant challenge and the systems need to be totally precise which make the HAIT a challenging task to implement. On the other hand, the vehicle systems comprise of less variables and they do not imply the loss of a large number of lives upon problem in the functionality.

5. CONCLUSIONS

This paper aims to elucidate the concept of HAIT, providing readers with essential insights for understanding its implications. HAIT serves to foster trust in automated automotive systems, particularly in the data sourced from vehicle sensors and RSUs. The concepts of human in, on, and over the loop are introduced, elucidating their significance. Furthermore, a comprehensive review of current academic research incorporating HAIT is conducted within the automotive domain. The main objective of this paper is to

closely align IoV and AI elements, facilitating their integration into cohesive solutions.

HAIT in the automotive industry is quite important since it may assist the driver to make the correct decision on specific tasks. Moreover, the driver's mental and physiological state may be monitored by sensors that will feed the AI model to intervene to decisions on the road. In general, HAIT is gaining a lot of attention since, the ML models that are used do not provide black box decisions, but engage the driver with explanations to the process. In this manner the driver is more aware of the new systems of the vehicle and the interconnection with other systems, like the RSSs, and attention is maximised. Explainability which is at the heart of HAIT will provide the driver with the means to trust the AI and acknowledge the decisions. Explainable AI (XAI) does exactly that. It enhances the trust between the AI and the driver.

HAIT is recently addressed in aviation and maritime, whereby the cooperation between the human and the AI will be evident. The next generation of HAIT will evolve with the contributions in Brain Computer Interfaces (BCI)s as well as the prevalence of level 5 automation, which means a completely automated vehicle. With this in mind, the driver will play a supervisory role rather than actively engaging in the driving and will be able to communicate with the vehicle using her thoughts. Comparing to aviation HAIT is therefore considered as a promising methodology. The HAIKU project aims to include HAIT, where 6 use cases that are given, including startle effect, UAVs and COVID spreading prevention to airports. Moreover, to our knowledge, several EU projects aim to include HAIT in the maritime industry where sensor fusion and connectivity is a major issue. Automation in maritime is evident and an inclusion of HAIT is a great step towards the future ships.

ACKNOWLEDGEMENT

This research was done as part of the HAIKU project. This project has received funding from the European Union's Horizon Europe Research and Innovation Programme HORIZON-CL5-2021-D6-01-13 (Grant numbers: 101075332), but this document does not necessarily reflect the views of the European Commission.

REFERENCES

- [1] Shaheen, M.Y. (2021). Applications of artificial intelligence (AI) in healthcare: A review. *ScienceOpen Preprints*.
- [2] Cao, L. (2022). AI in Finance: Challenges, techniques, and opportunities. *ACM Computing Surveys (CSUR)*, 55(3): 64. <https://doi.org/10.1145/3502289>
- [3] Holmes, W., Tuomi, I. (2022). State of the art and practice in AI in education. *European Journal of Education*, 57(4): 542-570. <https://doi.org/10.1111/ejed.12533>
- [4] Abduljabbar, R., Dia, H., Liyanage, S., Bagloee, S.A. (2019). Applications of artificial intelligence in transport: An overview. *Sustainability*, 11(1): 189. <https://doi.org/10.3390/su11010189>
- [5] Zeba, G., Dabić, M., Čičak, M., Daim, T., Yalcin, H. (2021). Technology mining: Artificial intelligence in

- manufacturing. *Technological Forecasting and Social Change*, 171: 120971. <https://doi.org/10.1016/j.techfore.2021.120971>
- [6] Javaid, M., Haleem, A., Khan, I.H., Suman, R. (2023). Understanding the potential applications of artificial intelligence in agriculture sector. *Advanced Agrochem*, 2(1): 15-30. <https://doi.org/10.1016/j.aac.2022.10.001>
- [7] Sarker, I.H., Furhad, M.H., Nowrozy, R. (2021). AI-driven cybersecurity: An overview, security intelligence modeling and research directions. *SN Computer Science*, 2(3): 173. <https://doi.org/10.1007/s42979-021-00557-0>
- [8] Kamran, S.S., Haleem, A., Bahl, S., Javaid, M., Prakash, C., Budhhi, D. (2022). Artificial intelligence and advanced materials in automotive industry: Potential applications and perspectives. *Materials Today: Proceedings*, 62: 4207-4214. <https://doi.org/10.1016/j.matpr.2022.04.727>
- [9] Arena, F., Collotta, M., Luca, L., Ruggieri, M., Termine, F.G. (2021). Predictive maintenance in the automotive sector: A literature review. *Mathematical and Computational Applications*, 27(1): 2. <https://doi.org/10.3390/mca27010002>
- [10] Rodriguez Valido, M., Gomez-Cardenes, O., Magdaleno, E. (2022). Monitoring vehicle pollution and fuel consumption based on AI camera system and gas emission estimator model. *Sensors*, 23(1): 312. <https://doi.org/10.3390/s23010312>
- [11] Hu, W.C., Wu, H.T., Cho, H.H., Tseng, F.H. (2020). Optimal route planning system for logistics vehicles based on artificial intelligence. *Journal of Internet Technology*, 21(3): 757-764. <https://doi.org/10.3966/160792642020052103013>
- [12] Xu, Q., Wang, B., Zhang, F., Regani, D.S., Wang, F., Liu, K.R. (2020). Wireless AI in smart car: How smart a car can be? *IEEE Access*, 8: 55091-55112. <https://doi.org/10.1109/ACCESS.2020.2978531>
- [13] Zhang, R., McNeese, N.J., Freeman, G., Musick, G. (2021). "An ideal human" expectations of AI teammates in human-AI teaming. *Proceedings of the ACM on Human-Computer Interaction*, 4(CSCW3): 246. <https://doi.org/10.1145/3432945>
- [14] Endsley, M.R., Kaber, D.B. (1999). Level of automation effects on performance, situation awareness and workload in a dynamic control task. *Ergonomics*, 42(3): 462-492. <https://doi.org/10.1080/001401399185595>
- [15] Gunter, G., Stern, R., Work, D.B. (2019). Modeling adaptive cruise control vehicles from experimental data: Model comparison. In *2019 IEEE Intelligent Transportation Systems Conference (ITSC)*, Auckland, New Zealand pp. 3049-3054. <https://doi.org/10.1109/ITSC.2019.8917347>
- [16] Hu, J., Xiong, S., Zha, J., Fu, C. (2020). Lane detection and trajectory tracking control of autonomous vehicle based on model predictive control. *International Journal of Automotive Technology*, 21: 285-295. <https://doi.org/10.1007/s12239-020-0027-6>
- [17] Ji, B., Zhang, X., Mumtaz, S., Han, C., Li, C., Wen, H., Wang, D. (2020). Survey on the internet of vehicles: Network architectures and applications. *IEEE Communications Standards Magazine*, 4(1): 34-41. <https://doi.org/10.1109/MCOMSTD.001.1900053>
- [18] Taylor, S.J., Ahmad, F., Nguyen, H.N., Shaikh, S.A. (2022). Vehicular platoon communication: Architecture, security threats and open challenges. *Sensors*, 23(1): 134. <https://doi.org/10.3390/s23010134>
- [19] Anderegg, A.H.A., Mulcare, S.P. (2021). Assuring human and artificial intelligence are appropriately informed in aviation systems. In *2021 IEEE/AIAA 40th Digital Avionics Systems Conference (DASC)*, San Antonio, TX, USA, pp. 1-6. <https://doi.org/10.1109/DASC52595.2021.9594348>
- [20] Kumar, S., Datta, S., Singh, V., Datta, D., Singh, S.K., Sharma, R. (2024). Applications, challenges, and future directions of human-in-the-loop learning. *IEEE Access*, 12: 75735-75760. <https://doi.org/10.1109/ACCESS.2024.3401547>
- [21] Wu, J., Huang, Z., Huang, C., Hu, Z., Hang, P., Xing, Y., Lv, C. (2021). Human-in-the-loop deep reinforcement learning with application to autonomous driving. *arXiv preprint arXiv:2104.07246*. <https://doi.org/10.48550/arXiv.2104.07246>
- [22] Gopinath, D., DeCastro, J., Rosman, G., Sumner, E., Morgan, A., Hakimi, S., Stent, S. (2022). HMIway-env: A framework for simulating behaviors and preferences to support human-AI teaming in driving. In *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*, New Orleans, LA, USA, pp. 4341-4349. <https://doi.org/10.1109/CVPRW56347.2022.00480>
- [23] Huang, M., Jiang, Z.P., Malisoff, M., Cui, L. (2021). Robust autonomous driving with human in the loop. In *Handbook of Reinforcement Learning and Control*, pp. 673-692. https://doi.org/10.1007/978-3-030-60990-0_22
- [24] Elmalaki, S. (2022). MAConAuto: Framework for mobile-assisted human-in-the-loop automotive system. In *2022 IEEE Intelligent Vehicles Symposium (IV)*, Aachen, Germany, pp. 740-749. <https://doi.org/10.1109/IV51971.2022.9827415>
- [25] Ahadi-Sarkani, A., Elmalaki, S. (2021). ADAS-RL: Adaptive vector scaling reinforcement learning for human-in-the-loop lane departure warning. In *Proceedings of the First International Workshop on Cyber-Physical-Human System Design and Implementation*, Nashville, TN, USA, pp. 13-18. <https://doi.org/10.1145/3458648.3460008>
- [26] Huang, Z., Sheng, Z., Ma, C., Chen, S. (2024). Human as AI mentor: Enhanced human-in-the-loop reinforcement learning for safe and efficient autonomous driving. *arXiv preprint arXiv:2401.03160*. <https://doi.org/10.48550/arXiv.2401.03160>
- [27] Dai, A., Xu, Y. (2022). Hidden Markov model based control augmentation design for a class of human-in-the-loop systems. *IEEE Transactions on Intelligent Transportation Systems*, 23(10): 18876-18888. <https://doi.org/10.1109/TITS.2022.3163615>
- [28] Janssen, C.P., Boyle, L.N., Kun, A.L., Ju, W., Chuang, L.L. (2019). A hidden Markov framework to capture human-machine interaction in automated vehicles. *International Journal of Human-Computer Interaction*, 35(11): 947-955. <https://doi.org/10.1080/10447318.2018.1561789>
- [29] Chiang, H.H., Wu, S.J., Perng, J.W., Wu, B.F., Lee, T.T. (2010). The human-in-the-loop design approach to the longitudinal automation system for an intelligent vehicle. *IEEE Transactions on Systems, Man, and Cybernetics-Part A: Systems and Humans*, 40(4): 708-720. <https://doi.org/10.1109/TSMCA.2010.2041925>
- [30] Kuru, K. (2021). Conceptualisation of human-on-the-

- loop haptic teleoperation with fully autonomous self-driving vehicles in the urban environment. *IEEE Open Journal of Intelligent Transportation Systems*, 2: 448-469. <https://doi.org/10.1109/OJITS.2021.3132725>
- [31] Hong, C.J., Aparow, V.R. (2021). System configuration of human-in-the-loop simulation for level 3 autonomous vehicle using IPG CarMaker. In 2021 IEEE International Conference on Internet of Things and Intelligence Systems (IoTaIS), Bandung, Indonesia, pp. 215-221. <https://doi.org/10.1109/IoTaIS53735.2021.9628587>
- [32] Chen, Z., Park, B.B., Hu, J. (2022). Design and evaluation of a human-in-the-loop connected cruise control. *IEEE Transactions on Vehicular Technology*, 71(8): 8104-8115. <https://doi.org/10.1109/TVT.2022.3172507>
- [33] Ropelato, S., Zünd, F., Magnenat, S., Menozzi, M., van Dinther, Y. (2018). Adaptive tutoring on a virtual reality driving simulator. *ETH Zurich International SERIES on Information Systems and Management in Creative EMedia*, 2017(2): 12-17. <https://doi.org/10.3929/ethz-b-000195951>
- [34] Ai, Y., Teng, S., Yang, Q., et al. (2024). iMAPeM: A new paradigm for implementing intelligent mining with humans in the loop. *IEEE Transactions on Systems, Man, and Cybernetics: Systems*. <https://doi.org/10.1109/TSMC.2024.3396139>
- [35] Wang, S., Feng, L., Xiao, D., Hu, Y. (2024). Human-in-the-loop assisted trafficability prediction for planetary rover on soft dangerous terrains. *IEEE Transactions on Automation Science and Engineering*. <https://doi.org/10.1109/TASE.2024.3353815>
- [36] Kaufman, R., Kirsh, D., Weibel, N. (2024). Developing situational awareness for joint action with autonomous vehicles. *arXiv preprint arXiv:2404.11800*. <https://doi.org/10.48550/arXiv.2404.11800>
- [37] Usman, M., Carie, A., Marapelli, B., Bedru, H.D., Biswas, K. (2020). A human-in-the-loop probabilistic CNN-fuzzy logic framework for accident prediction in vehicular networks. *IEEE Sensors Journal*, 21(14): 15496-15503. <https://doi.org/10.1109/JSEN.2020.3023661>
- [38] Schmidt, S., Rao, Q., Tatsch, J., Knoll, A. (2020). Advanced active learning strategies for object detection. In 2020 IEEE Intelligent Vehicles Symposium (IV), Las Vegas, NV, USA, pp. 871-876. <https://doi.org/10.1109/IV47402.2020.9304565>
- [39] Deng, M., Chen, J., Wu, Y., Ma, S., Li, H., Yang, Z., Shen, Y. (2024). Using voice recognition to measure trust during interactions with automated vehicles. *Applied Ergonomics*, 116: 104184. <https://doi.org/10.1016/j.apergo.2023.104184>
- [40] Vats, V., Nizam, M.B., Liu, M., et al. (2024). A survey on human-AI teaming with large pre-trained models. *arXiv preprint arXiv:2403.04931*. <https://doi.org/10.48550/arXiv.2403.04931>
- [41] Brennan, E. (2019). ATM's need for artificial intelligence. <https://www.eurocontrol.int/editorial/atms-need-artificial-intelligence>
- [42] Wei, P., Surakitbanharn, C., Landry, S., Sun, D. (2012). Workload evaluation of sectorized air traffic control and stream management. In 2012 Integrated Communications, Navigation and Surveillance Conference, Herndon, VA, USA, pp. N2-1-N2-8. <https://doi.org/10.1109/ICNSurv.2012.6218429>
- [43] Xie, Y., Pongsakornsathien, N., Gardi, A., Sabatini, R. (2021). Explanation of machine-learning solutions in air-traffic management. *Aerospace*, 8(8): 224. <https://doi.org/10.3390/aerospace8080224>
- [44] Zeldam, S.G. (2018). Automated failure diagnosis in aviation maintenance using explainable artificial intelligence (XAI). Master's thesis, University of Twente.
- [45] Saraf, A.P., Chan, K., Popish, M., Browder, J., Schade, J. (2020). Explainable artificial intelligence for aviation safety applications. In AIAA Aviation 2020 Forum, pp. 2881. <https://doi.org/10.2514/6.2020-2881>
- [46] Gössling, S., Humpe, A. (2020). The global scale, distribution and growth of aviation: Implications for climate change. *Global Environmental Change*, 65: 102194. <https://doi.org/10.1016/j.gloenvcha.2020.102194>